

APP180 P


TIS #417

ITEM NUMBERS:

- W70PWP1800P (White)**
- W70PBP1800P (Black)**

Description:

Firestone APP 180 P is a granule surfaced APP modified bitumen membrane. It consists of select asphalt, modified with atactic polypropylene, and reinforced with a non-woven 190 g/m² (3.9 lb/100ft²) polyester mat, enhanced with continuous glass fiber strands in the machine direction. The combination results in a flexible, yet durable roofing membrane that exceeds the performance requirements of ASTM D 6222 Type I, Grade G. APP 180 P membranes are ideal for both new construction and re-roofing applications as a cap sheet, or as a flashing sheet in multi-ply applications. Low slope roofs of any size, even those with numerous penetrations, may accommodate a Firestone APP 180 P membrane application.

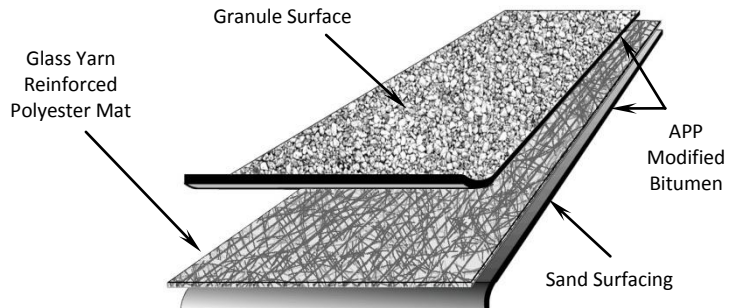

Method of Application:

1. APP 180 P membrane shall be fully heat welded to an approved substrate. Please see the APP Design and Application Guide at www.firestonebpco.com for detailed information regarding the application of APP180 P membrane.

Storage:

- All material should be stored out of the weather in a clean, dry area in its original unopened packaging at a minimum of 50 °F (10 °C) and a maximum of 100 °F (38 °C) so that it will be 50 °F (10 °C) or above at the time of application.
- If material must be stored temporarily on the roof before application, it must be elevated from the roof surface on a pallet, stored on end, and covered from the weather with a light colored opaque tarp in a neat, safe manner that does not exceed the allowable load limit of the storage area.
- Stack Firestone APP180 P material squarely in the original unopened packaging not more than two (2) pallets high.

Precautions:

- Take care when transporting and handling Firestone Modified Bitumen rolls to avoid punctures and other types of physical damage.
- Isolate waste products, petroleum products, grease, oil (mineral and vegetable) and animal fats from all Firestone Modified Bitumen membranes.
- Consult your Technical Coordinator at 800-428-4511 for specific recommendations.
- Refer to Material Safety Data Sheet for APP Membranes and Flashing.

Compliance:

Post Consumer Recycled Content: 6%
 Pre Consumer Recycled Content: 0%
 Manufacturing Location: Beech Grove, IN



Note:
 Dade County Approval of UltraWhite products is pending

Packaging:

Roll Width:	3.3 ft (1m)
Roll Length	32' 10" (10 m)
Net Coverage :	98 ft ² (9 m ²)
Roll Weight :	98 lb (39 kg)
Pallet Size :	48" x 39" (1.2 m x 1m)
Rolls per Pallet:	20
Weight per Pallet	2,020 lb (916 kg)

TECHNICAL INFORMATION SHEET

APP180 P

ASTM D 6222 Type I, Grade G

Physical Properties Tested in accordance with ASTM D 5147	ASTM Standard		Firestone Value	Metric Units	Firestone Value
	Required Value	Units			
Product Thickness	140	mil	162	mm	4.1
Net Mass	70	lb/100ft ²	93	g/m ²	4,554
Bottom Side Coating	30	mil	48	mm	1.2
Peak Load @ 0 °F (-18 °C)	60	lbf/inch, MD	120	kN/m	21
	60	lbf/inch, CD	100	kN/m	18
Elongation @ Peak Load @ 0 °F (18 °C)	10	% MD	24	%	24
	10	% CD	29	%	29
Peak Load @ 73 °F (-25 °C)	50	lbf/inch, MD	90	kN/m	21
	50	lbf/inch, CD	80	kN/m	16
Elongation @ Peak Load @ 73 °F (25 °C)	23	% MD	42	%	42
	23	% CD	51	%	51
Ultimate Elongation @ 5% of Peak load 73 °F (25 °C)	30	% MD	45	%	45
	30	% CD	57	%	57
Tear Strength @ 73 °F (25 °C)	70	lbf, MD	90	N	400
	70	lbf, CD	120	N	534
Dimensional Stability	1	% Change MD	-0.05	%	-0.05
	1	% Change CD	0.04	%	0.04
Low Temperature Flexibility	0	°F	14	°C	-10
Compound Stability	230	°F	270	°C	132

Acceptable Substrates:

Structural Concrete (New and Existing)

Gypsum

Lightweight Concrete

Plywood and OSB

Notes:

Please consult the APP Design and Application Guide and Quick Specs on line at www.firestonebpc.com to review specific information regarding fastener types appropriate for the type of deck and insulation in use.

Mechanical attachment only

Requires a mechanically attached base sheet

Requires a mechanically attached base sheet or BaseGard SA

Firestone Insulation:

ISO 95+™GL

ISOGARD™ HD

RESISTA™

DensDeck

Requires a coverboard when applied in hot asphalt

Cannot be installed in hot asphalt

Cannot be installed in hot asphalt

Cannot be encapsulated in hot asphalt

Reflectivity:



Solar Reflectance

Thermal Emittance

Rated Product ID

Licensed Manufacturer ID

Classification

Initial

Weathered

#

0.73

Pending

0.89

Pending

0034

0608

Production Line

Please Contact your Firestone Technical Coordinator at 1-800-428-4511 for further information.

This sheet is meant to highlight Firestone products and specifications and is subject to change without notice. Firestone takes responsibility for furnishing quality materials which meet published Firestone product specifications. Neither Firestone nor its representatives practice architecture. Firestone offers no opinion on and expressly disclaims any responsibility for the soundness of any structure. Firestone accepts no liability for structural failure or resultant damages. Consult a competent structural engineer prior to installation if the structural soundness or structural ability to properly support a planned installation is in question. No Firestone representative is authorized to vary this disclaimer.