


QuickSeam™ Reinforced Perimeter Fastening (RPF) Strip

Item Description
3" x 100' Roll

Item Number
W56RAC1632

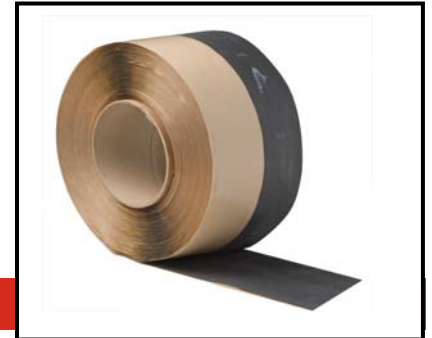

Product Information

Description:

QuickSeam Reinforced Perimeter Fastening (RPF) Strip is a 6" (152.4 mm) wide RubberGard™ MAX membrane with 3" (76.2 mm) wide QuickSeam Tape factory laminated to it along one edge. It is used for non-penetrating base flashing details as specified in Firestone Specifications and Details.

Method of Application:

1. Unroll the QuickSeam RPF Strip with the release paper up and the tape portion farthest away from the wall or penetration.
2. Anchor QuickSeam RPF Strip using Firestone 2" seam plates and fasteners 12" o.c. max. (305 mm) per current base tie-in details.
3. **Attachment option:** QuickSeam RPF Strip may be fastened with metal or polymer batten strips to the deck (in the mechanically-attached and fully-adhered systems only) or fastened into the wall (metal battens only). Polymer batten may be used to fasten into wood sheathed parapet walls. Refer to appropriate Firestone details for specifics.
4. Position EPDM membrane over QuickSeam RPF Strip with release paper in place and allow membrane to relax.
5. Fold back EPDM membrane to expose the tape.
6. Prime the EPDM to be spliced to the tape using QuickPrime™ Plus, QuickPrime Plus LVOC, Single-Ply QuickPrime or Single-Ply LVOC Primer and QuickScrubber™ or QuickScrubber Plus pad and handle per current procedures.
7. Use touch-push test to determine when the Primer is ready to be mated to the tape.
8. Remove the release liner from tape.
9. Roll the primed EPDM membrane into the tape.
10. The portion of the QuickSeam RPF Strip without tape may be bonded to the membrane using Firestone EPDM Bonding Adhesive BA-2004, Water-Based Bonding Adhesive, Single-Ply LVOC Bonding Adhesive, or Splice Adhesive SA-1065.
11. Roll the EPDM membrane over the QuickSeam RPF Strip with a 1½" (50.8 mm) wide silicone hand roller to ensure proper adhesion.

Storage:

- Store in original unopened containers indoors at temperatures between 60 °F (15.6 °C) and 80 °F (26.7 °C).
- Do not store on roof in direct sunlight or at temperatures above 80 °F (26.7 °C).
- When exposed to lower temperatures; restore to room temperature prior to use.
- Shelf life of two years can be expected when stored in original container at temperatures between 60 °F (15.6 °C) and 80 °F (26.7 °C).
- Shelf life will be shortened if exposed to elevated temperatures.

QuickSeam™ Reinforced Perimeter Fastening (RPF) Strip

Shelf Life:

- Shelf life of two years can be expected when stored in original container at temperatures between 60 °F (15.6 °C) and 80 °F (26.7 °C).
- Shelf life will be shortened if exposed to elevated temperatures.

Precautions:

Refer to Safety Data Sheet (SDS).

LEED® Information:

Post Consumer Recycled Content: 0%
 Post Industrial Recycled Content: 0%
 Manufacturing Location: Prescott, AR
 *NOTE: LEED® is a registered trademark of the U.S. Green Building Council.

Packaging:

2 rolls per carton
 21 cartons per pallet

NOTE: QuickScrubber and/or QuickScrubber Plus pads and handles are included in each carton. Quantities vary depending on the QuickSeam product.

Typical Properties

QuickSeam Tape		RubberGard Max	
Property	Test Method	Property	Test Method
Base	Rubber Polymers	Base	EPDM
Color	Black	Color	Black
Solvents	None	Solvents	None
Solids	100%	Solids	100%
Specific Gravity	98 ± 0.02 (H ₂ O = 1)	Cured State	Cured
Cured State	Cured	Thickness	0.060" (1.52 mm) ± 10%
Thickness	0.030" (0.77 mm) ± 0.007" (0.18 mm)	Width	6" + 0, - 0.125"
Width	3" (133.3 mm) + 0, - 1/16"	Breaking Strength	80 lb/ft (355.9 N)
Length	100' (30.48 m) +1/-0		

Please contact Quality Building Services Technical Department at 1-800-428-4511 for further information.

This sheet is meant to highlight Firestone products and specifications and is subject to change without notice. Firestone takes responsibility for furnishing quality materials which meet published Firestone product specifications. Neither Firestone nor its representatives practice architecture. Firestone offers no opinion on and expressly disclaims any responsibility for the soundness of any structure. Firestone accepts no liability for structural failure or resultant damages. Consult a competent structural engineer prior to installation if the structural soundness or structural ability to properly support a planned installation is in question. No Firestone representative is authorized to vary this disclaimer.